

YACHT

SANLORENZO

SX

112/

SX
112/




SX
112/



SX
112/



SX
112/

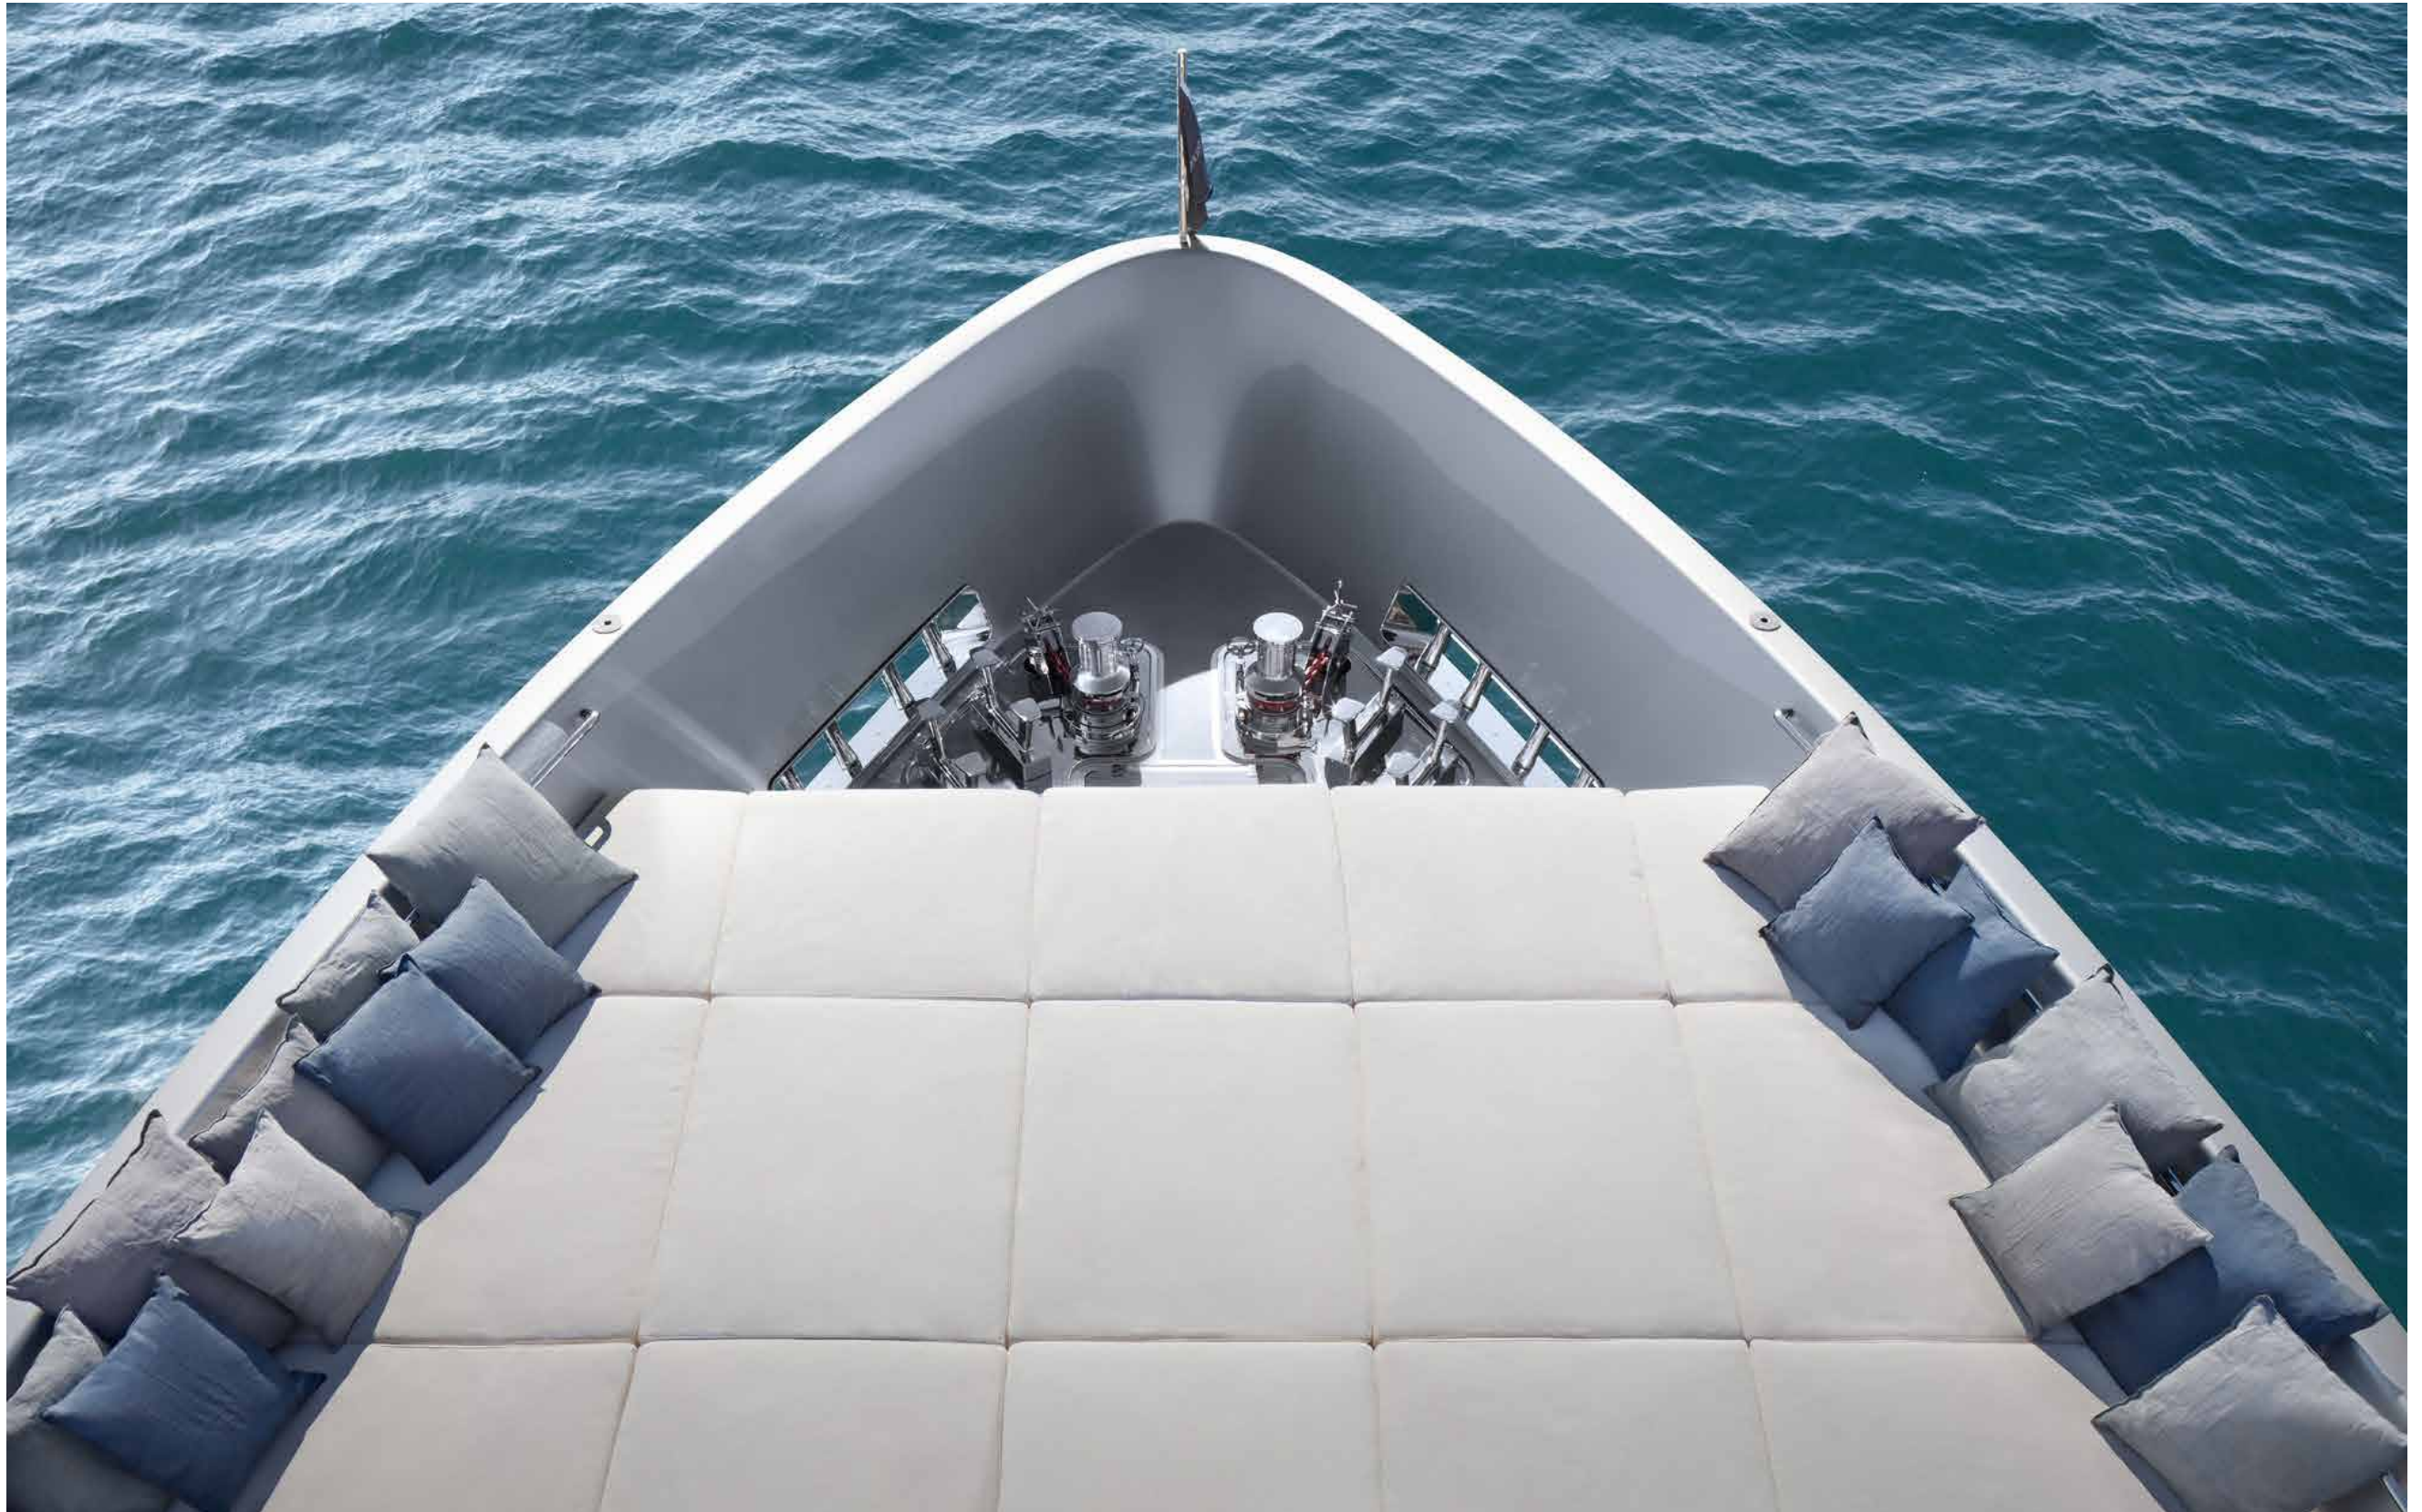

SX
112/


















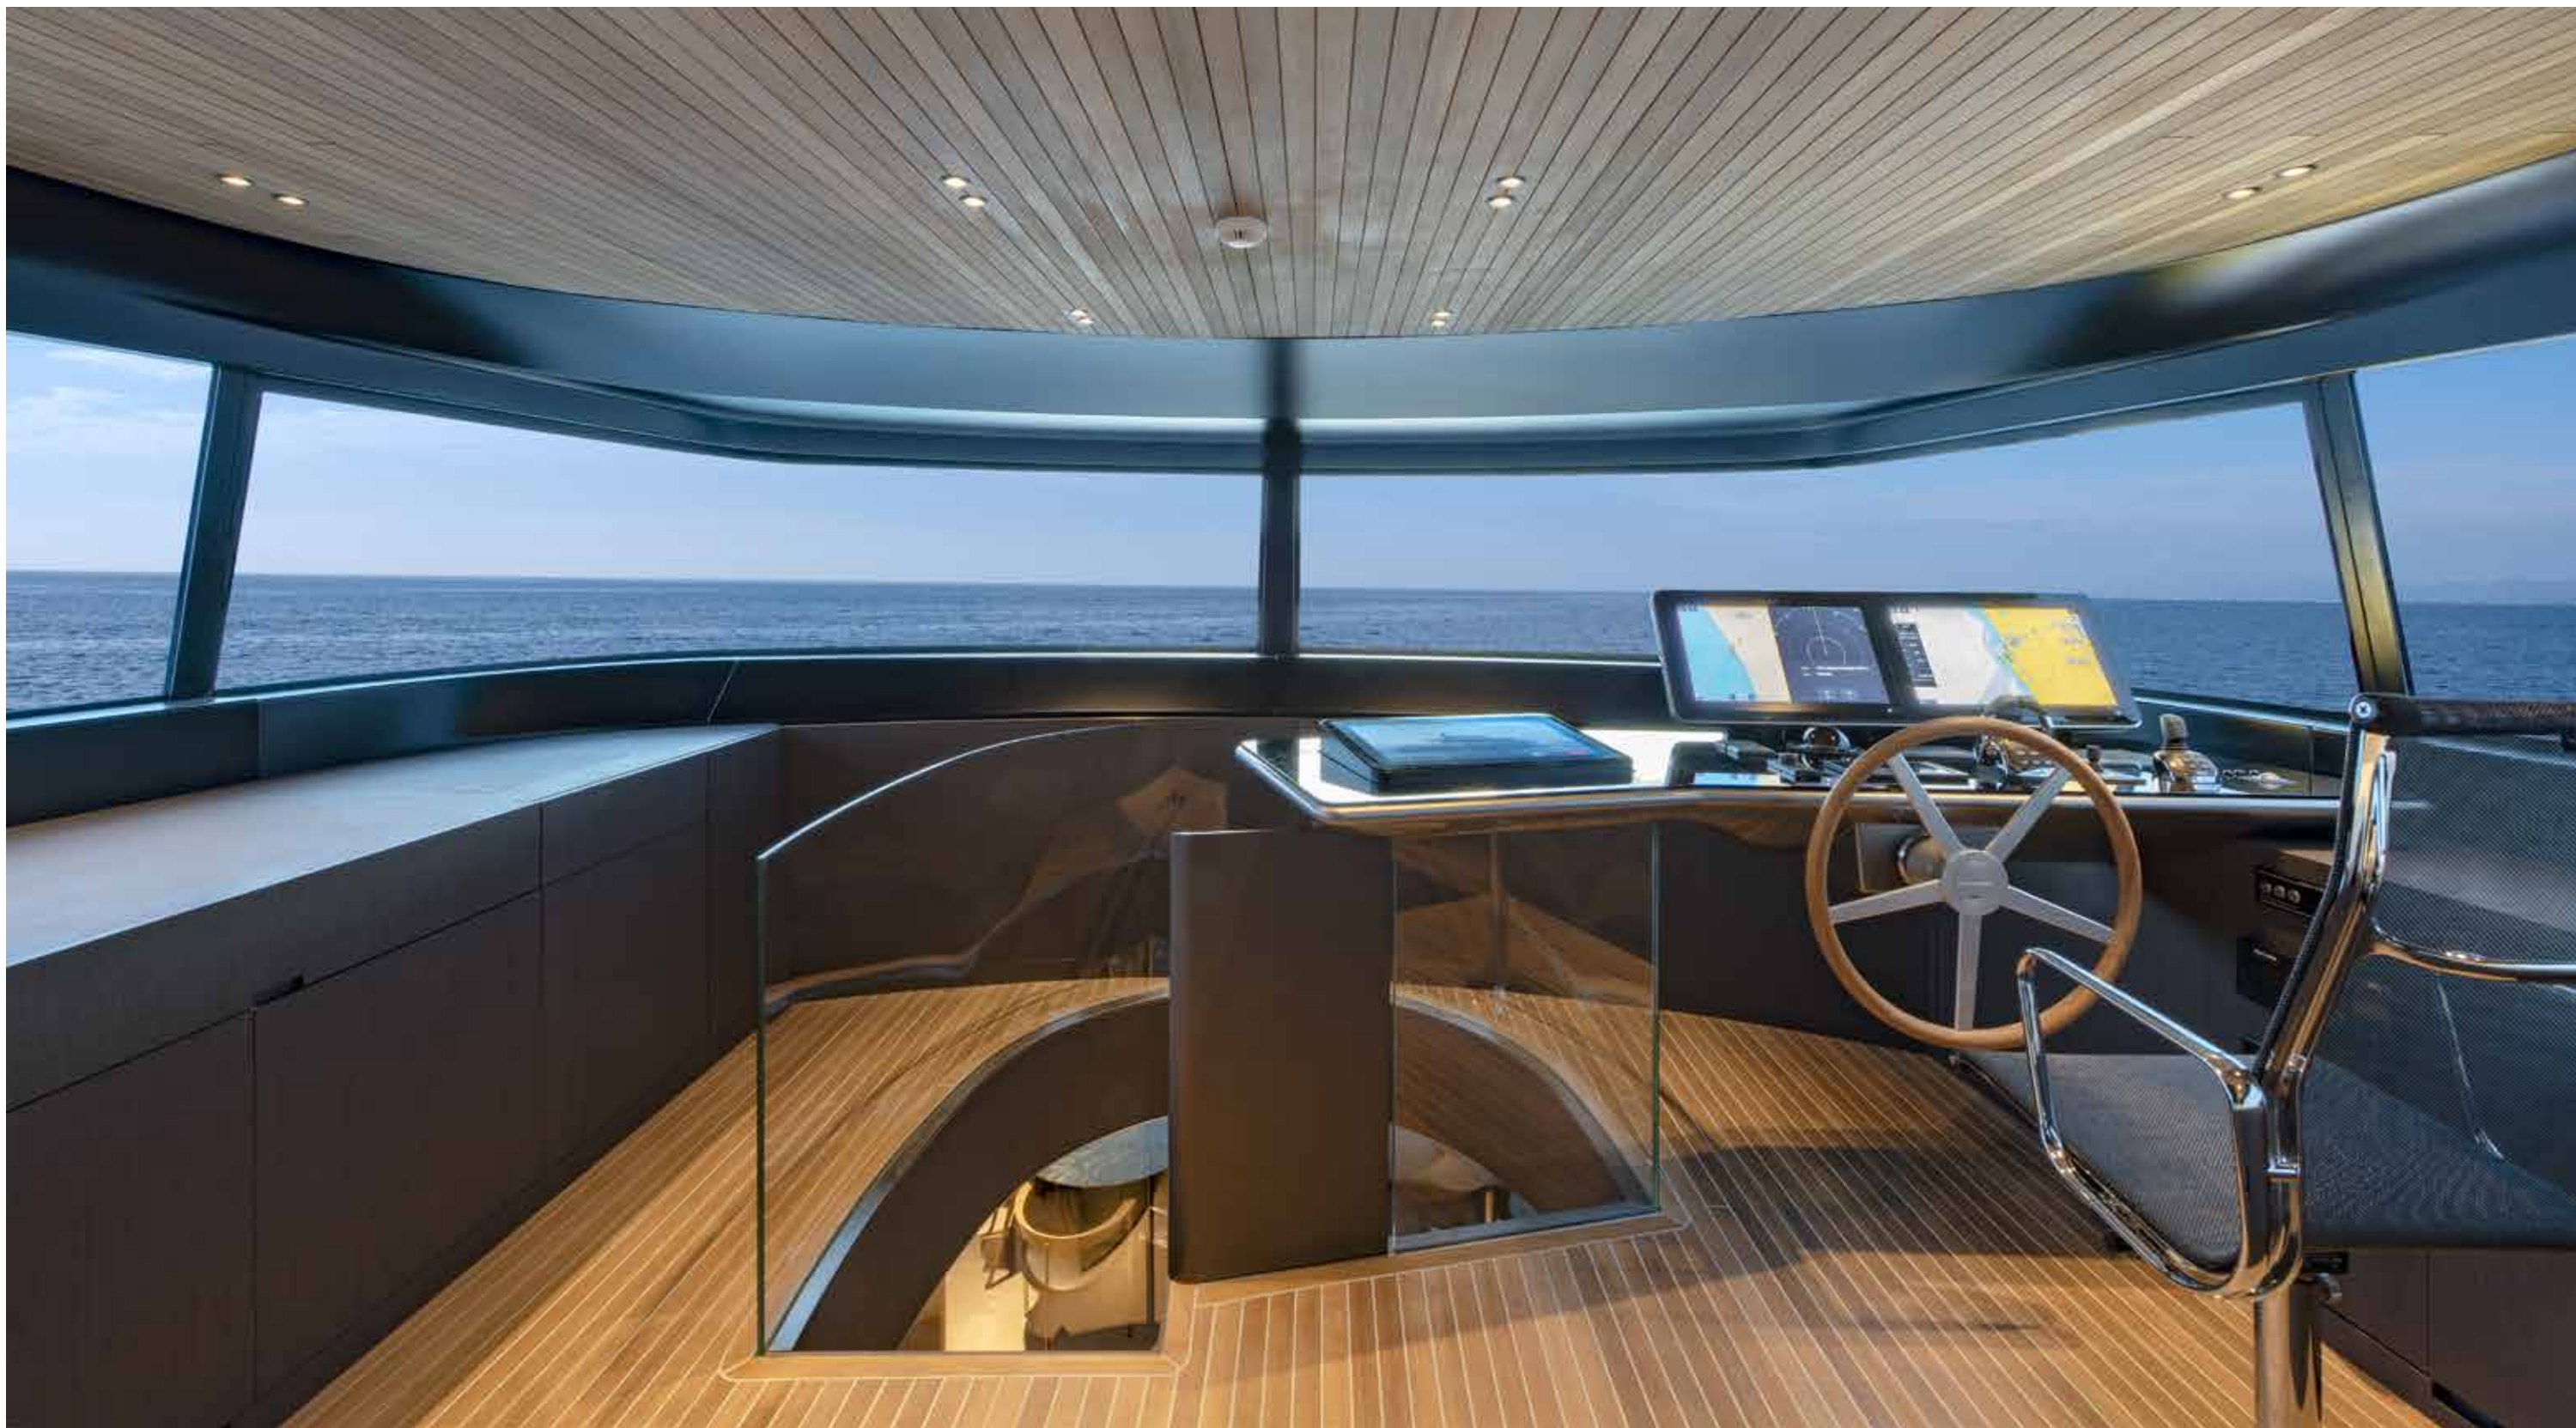



















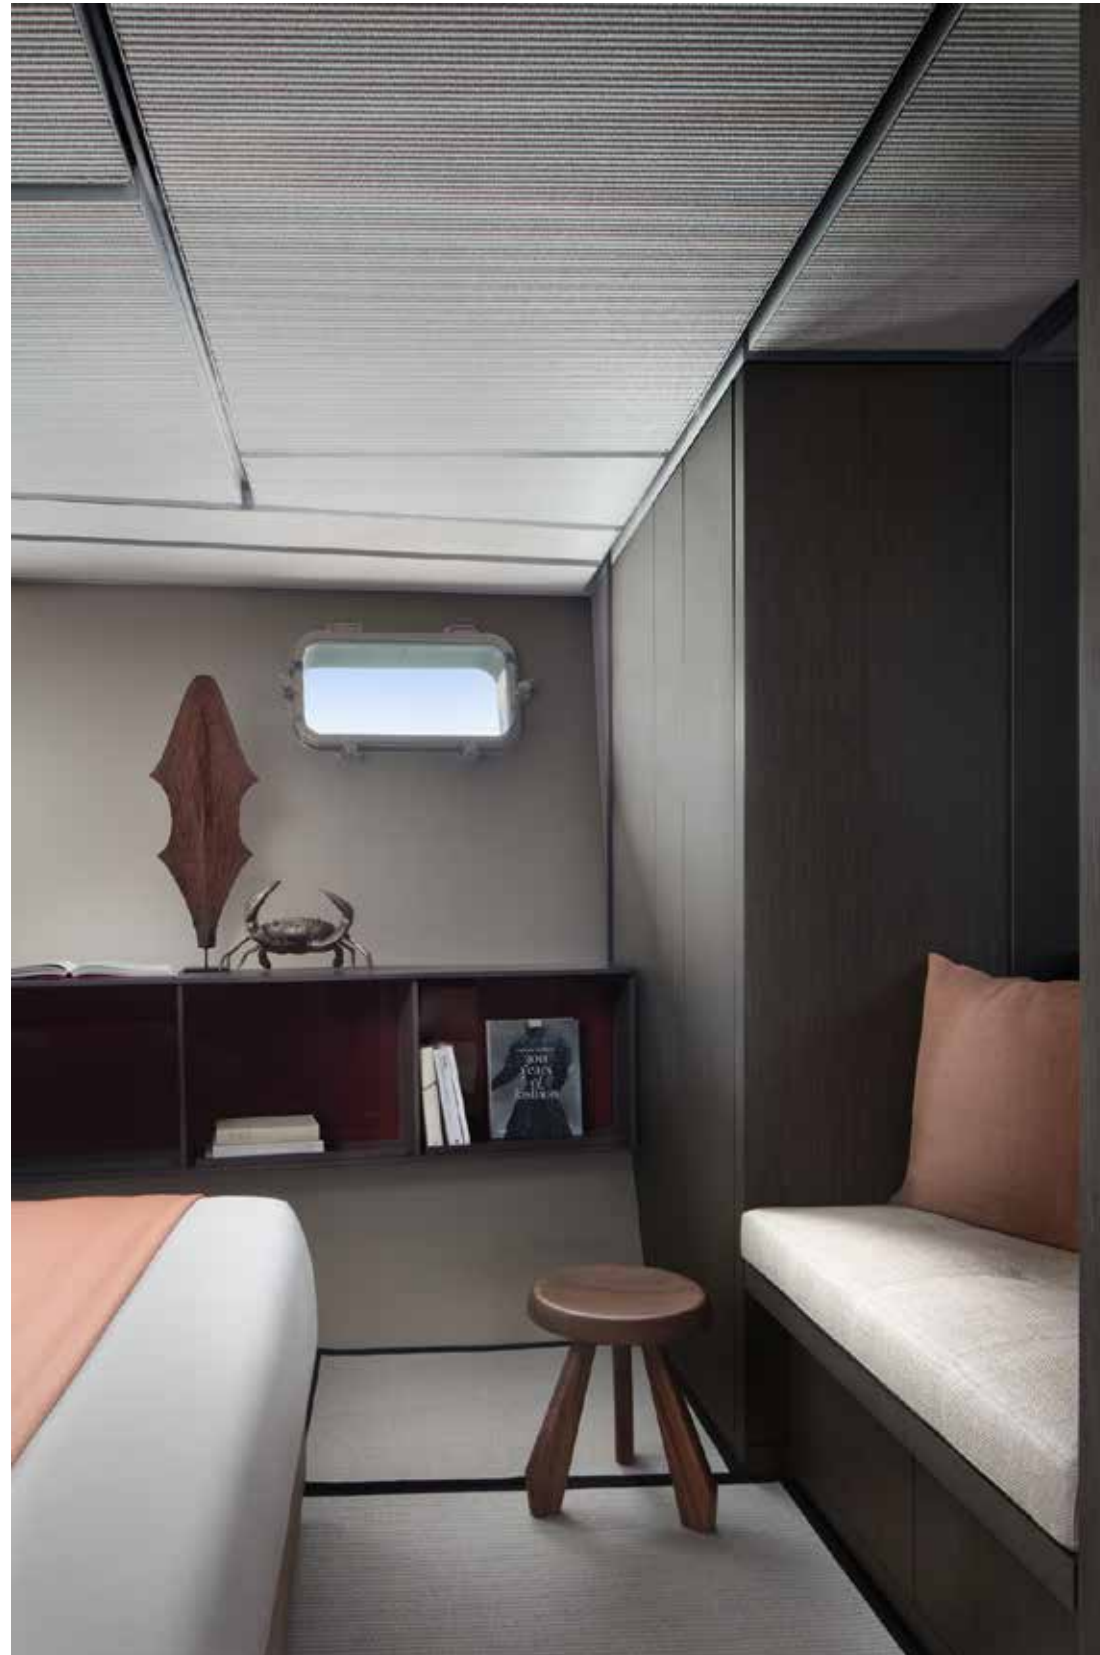



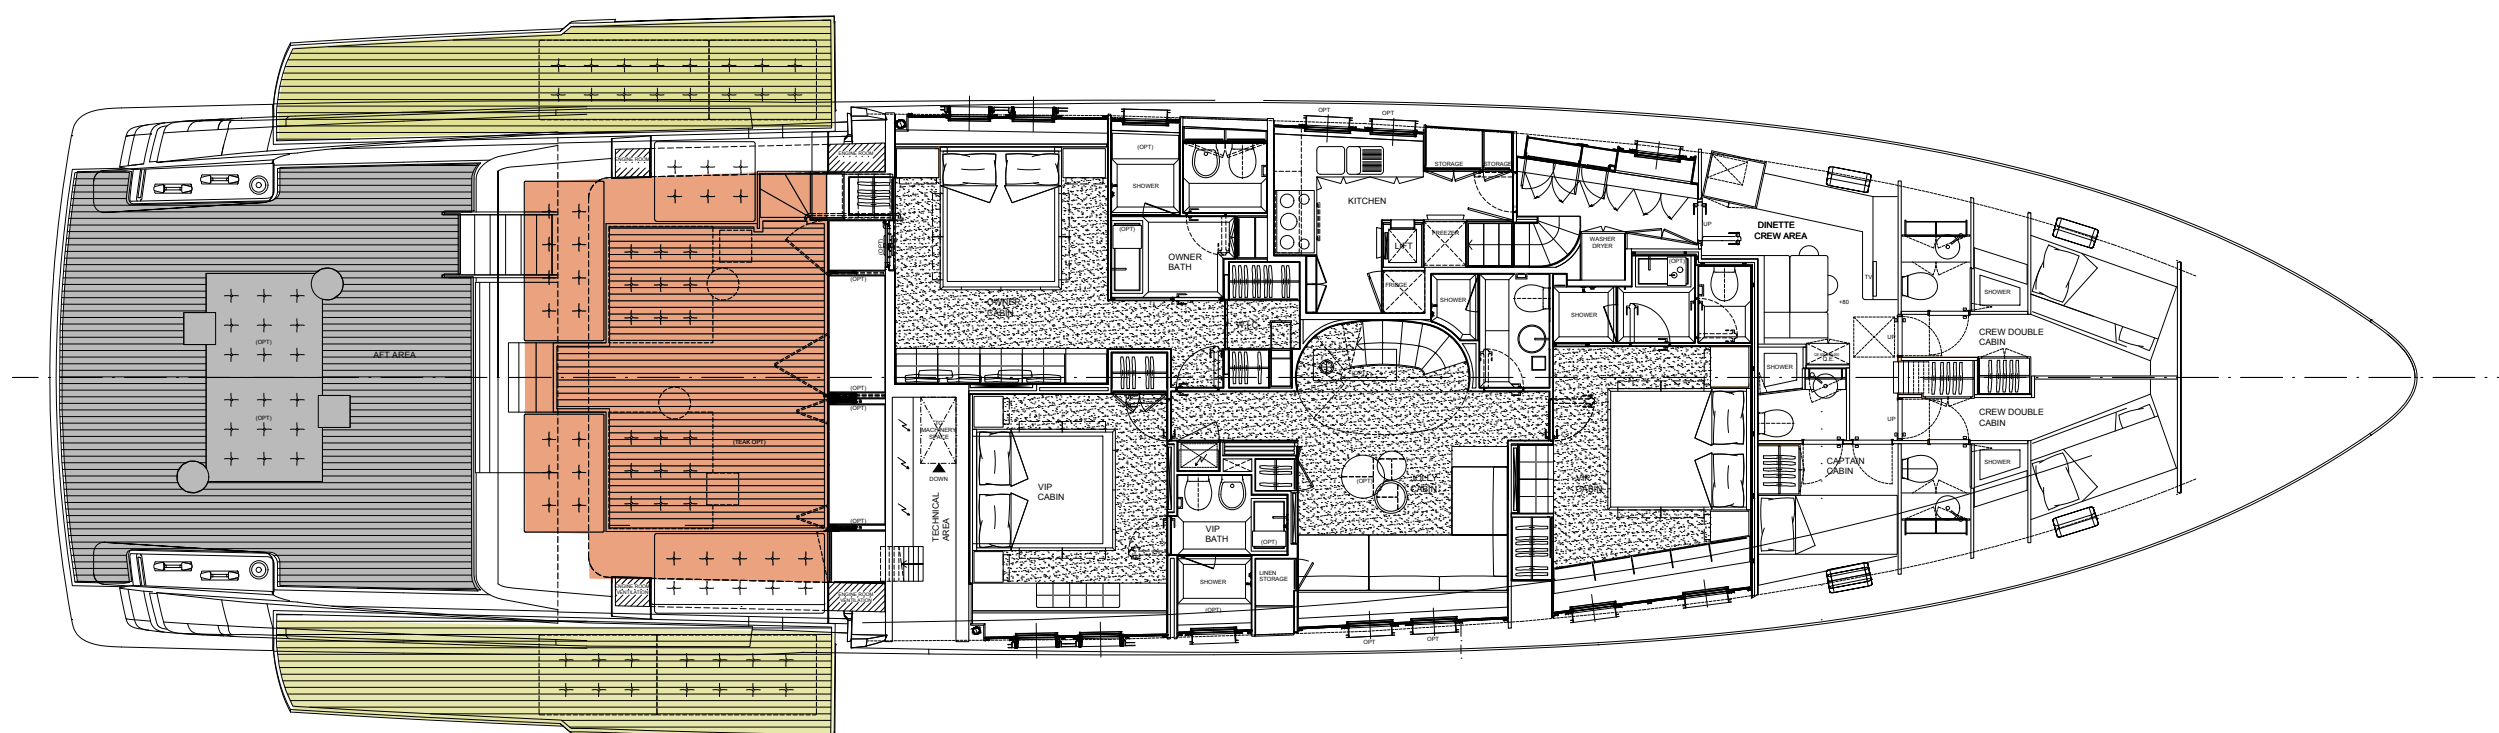

- Beach club: 29 sqm
- Exterior beach club: 36 sqm
- Terraces: 22 sqm
- Total beach area: 90 sqm

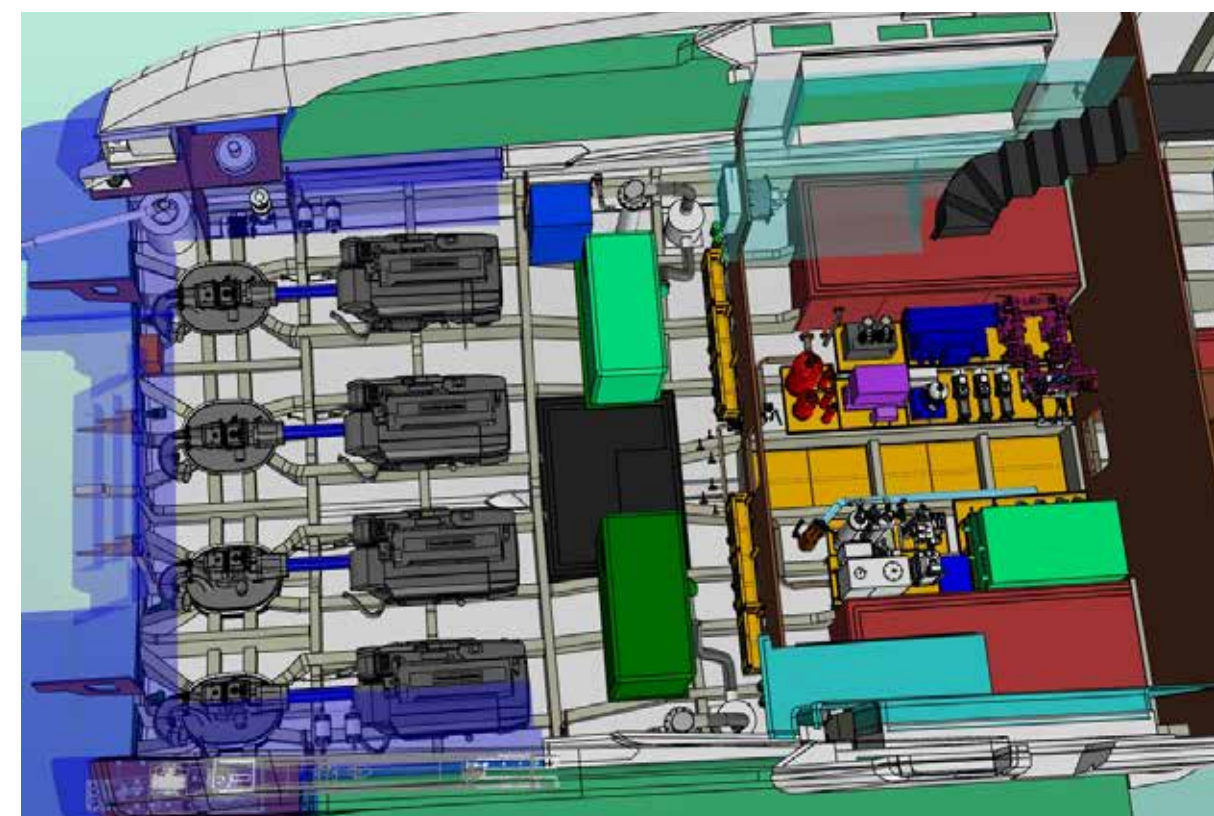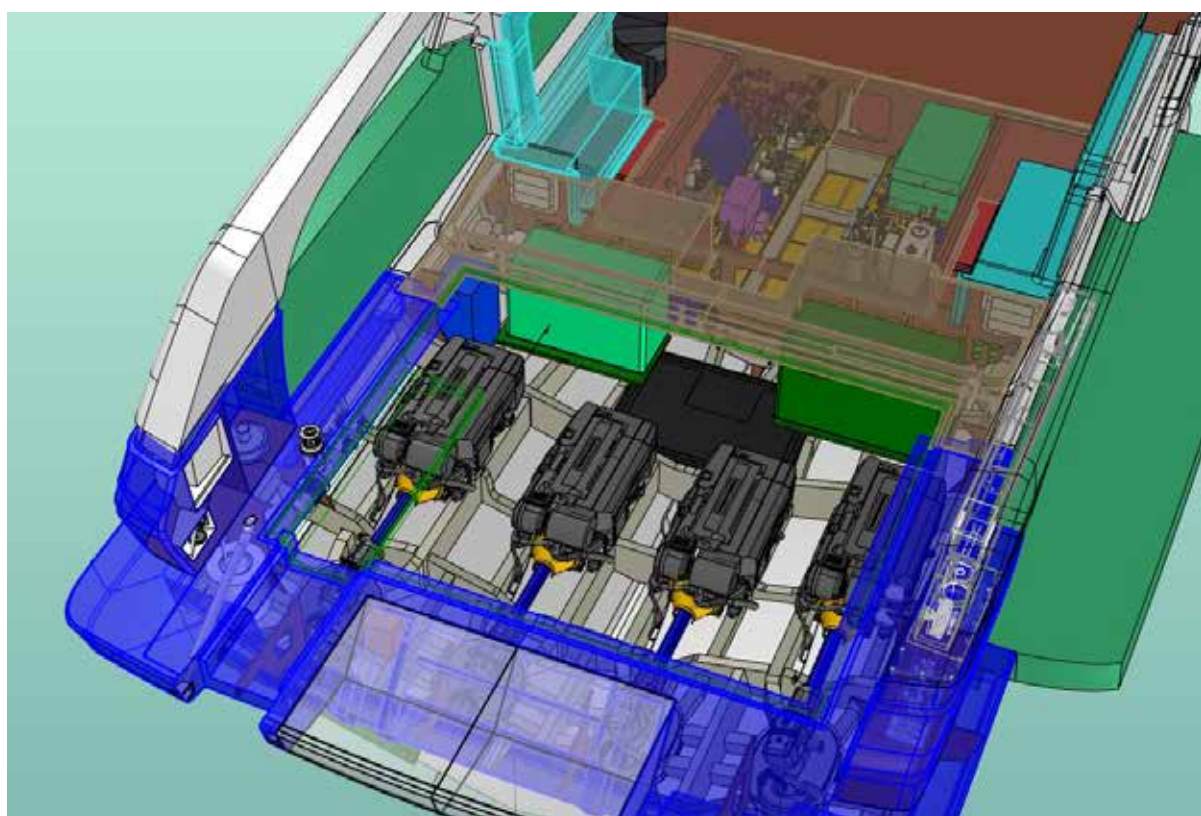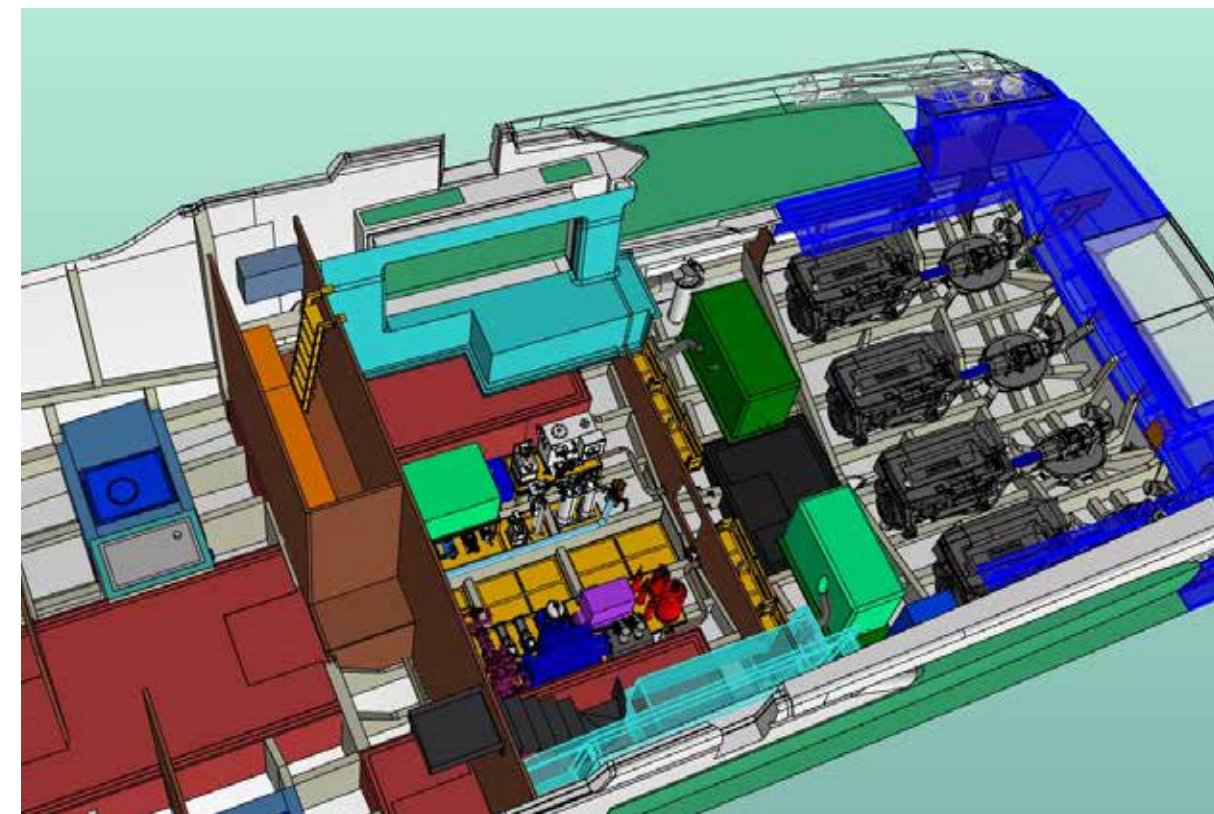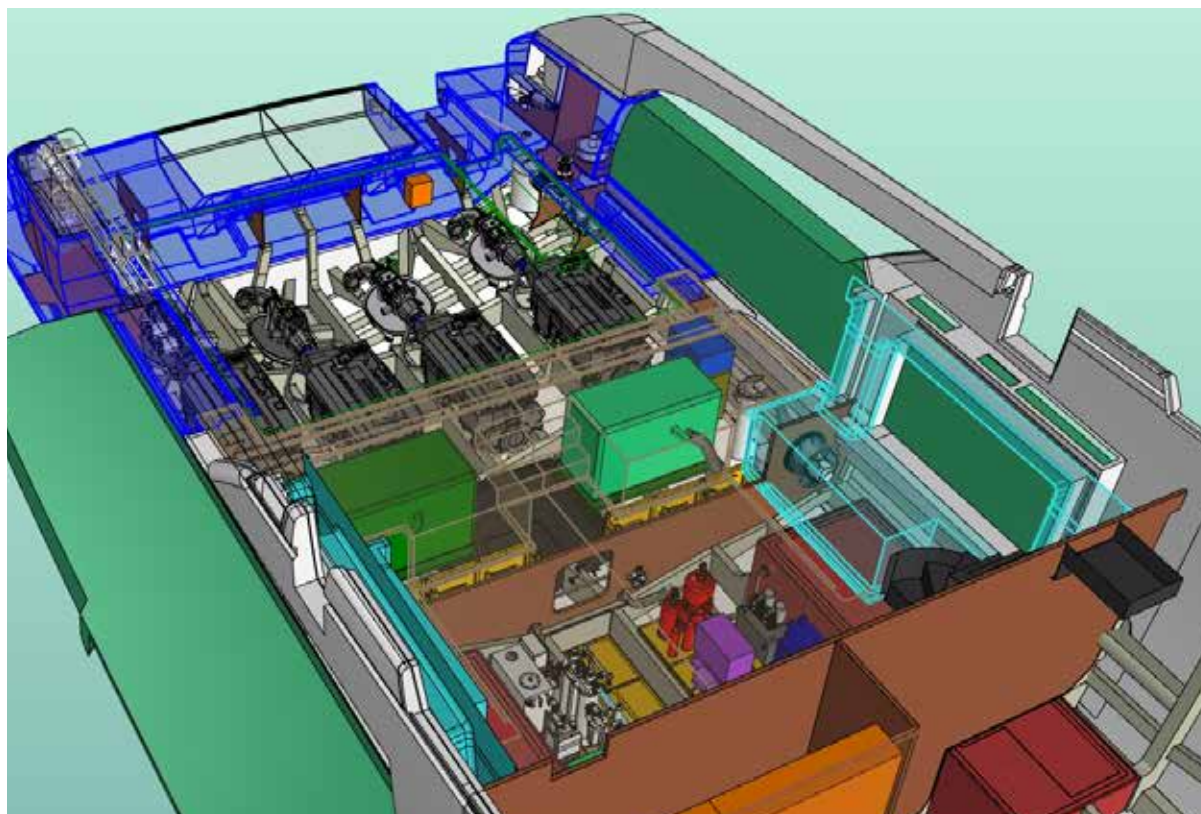









SX
112/




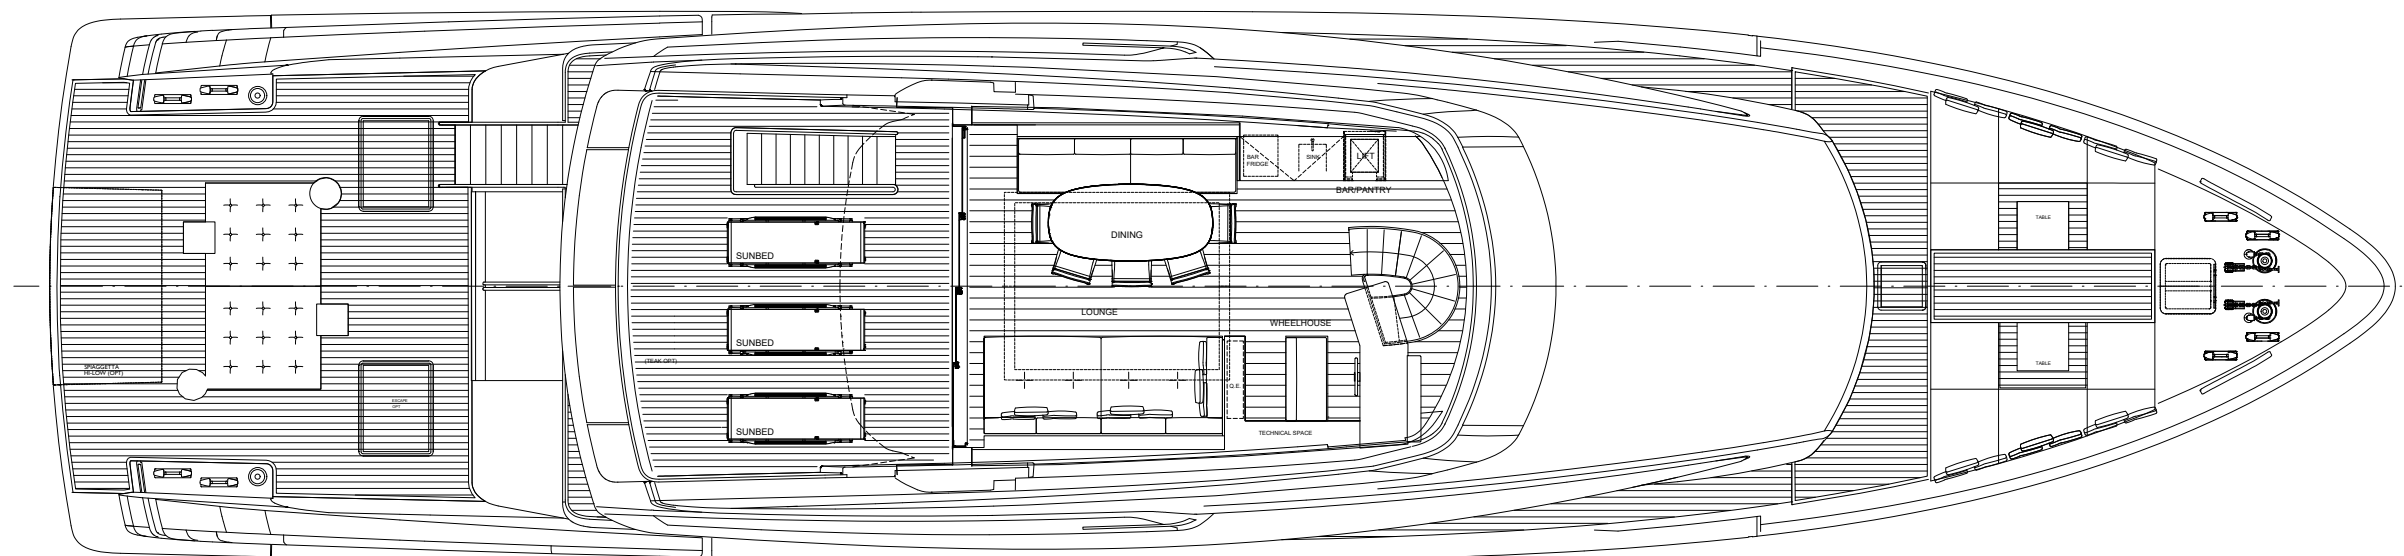


Main deck

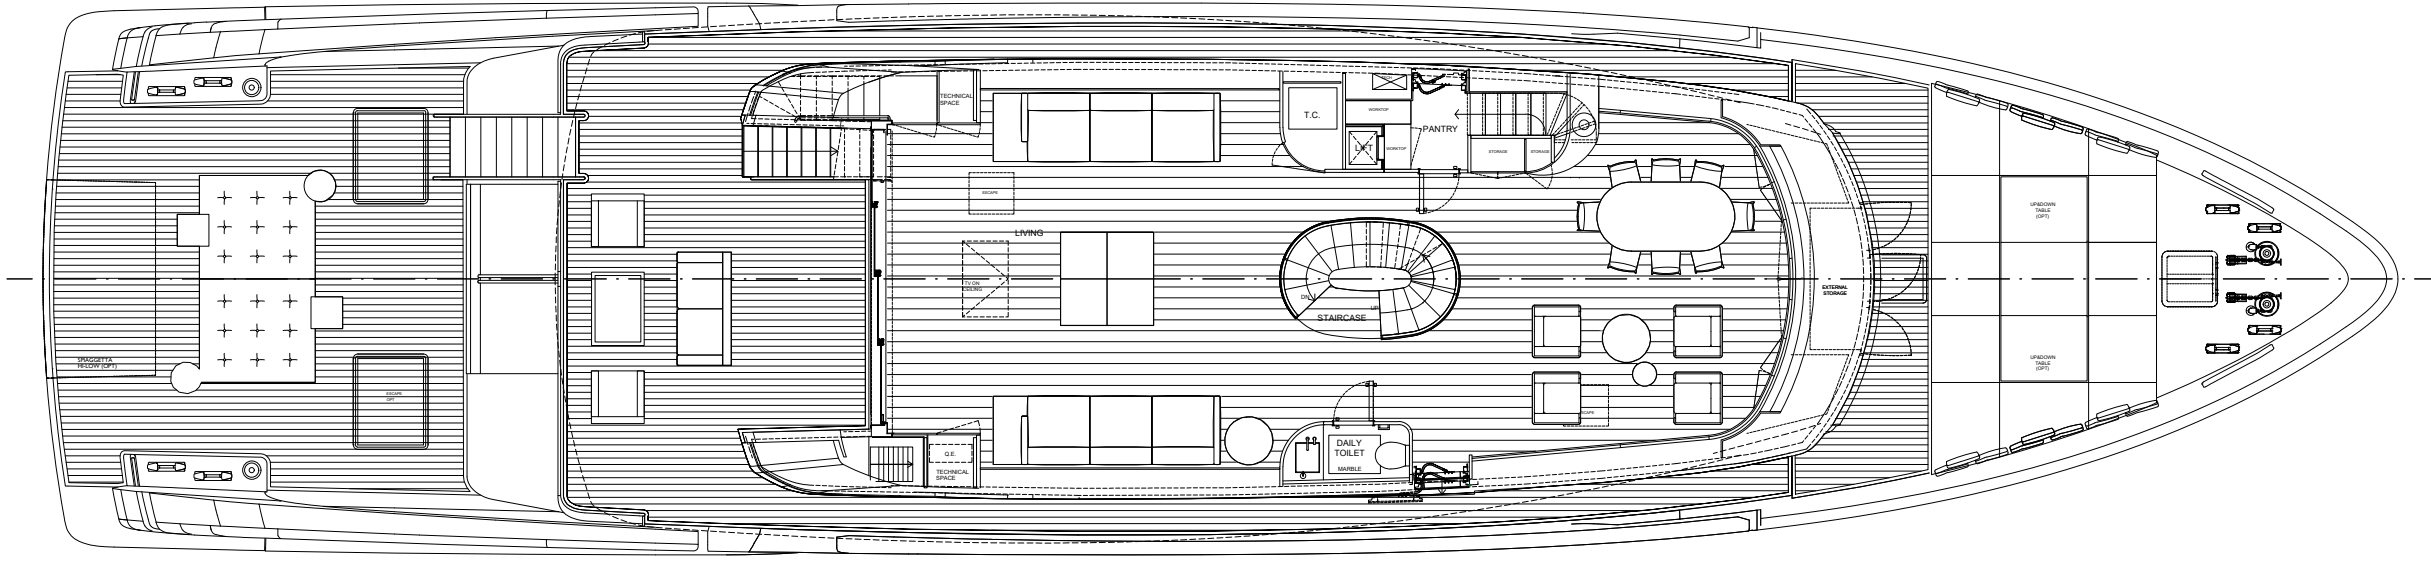


Lower deck

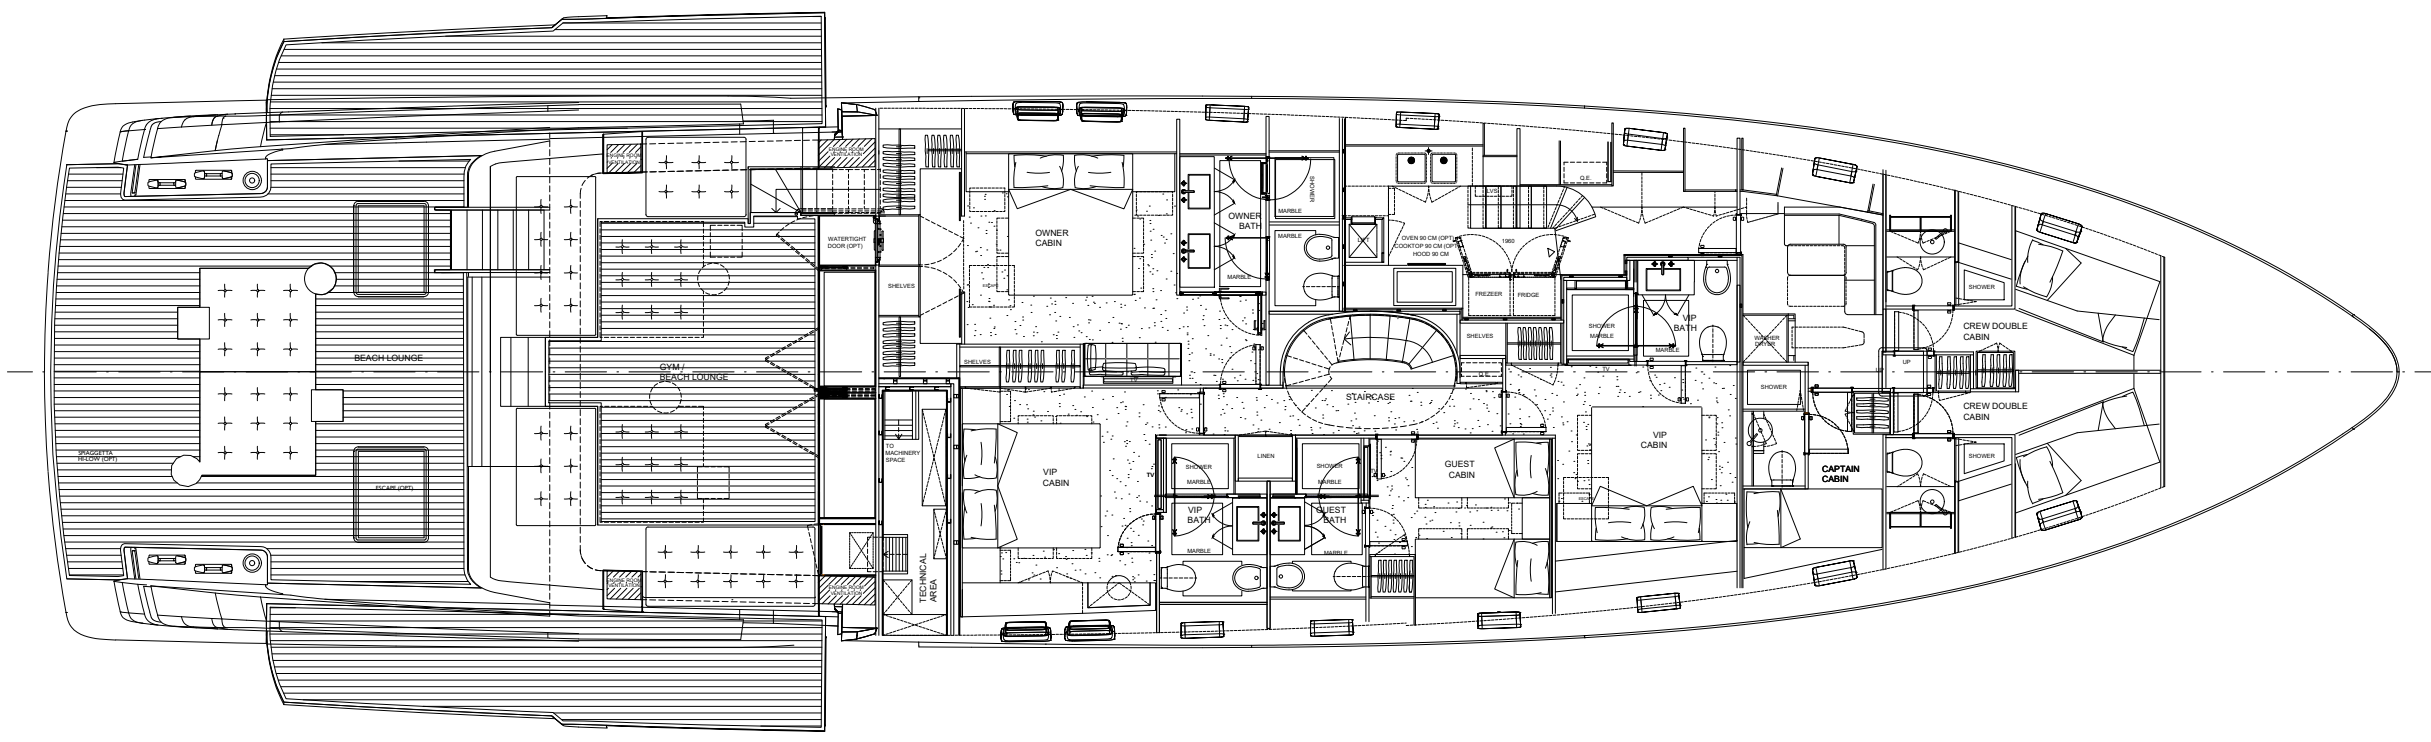


Main deck

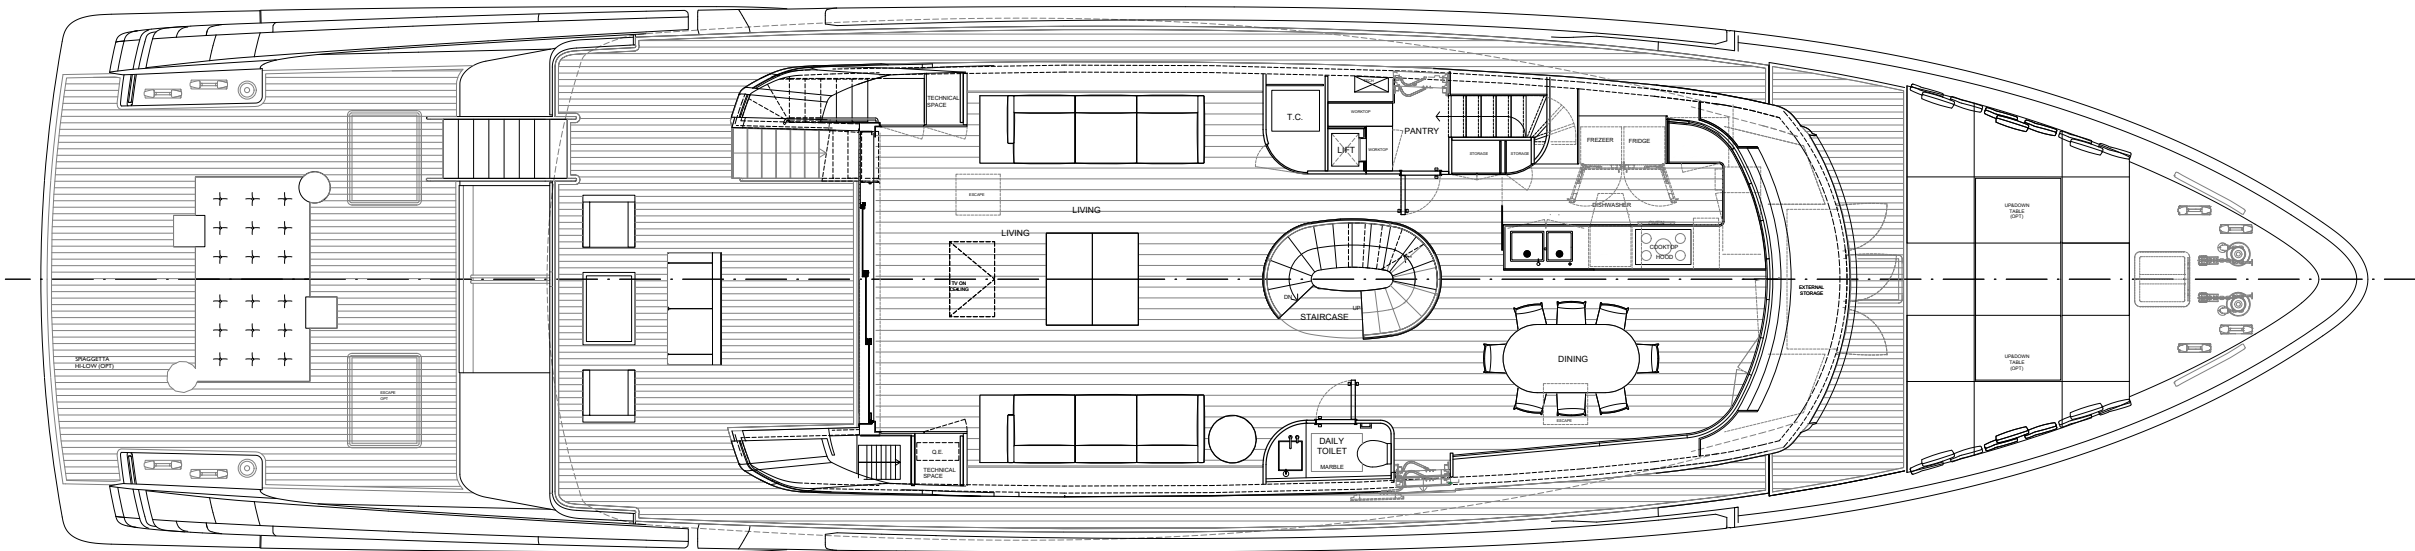


Lower deck

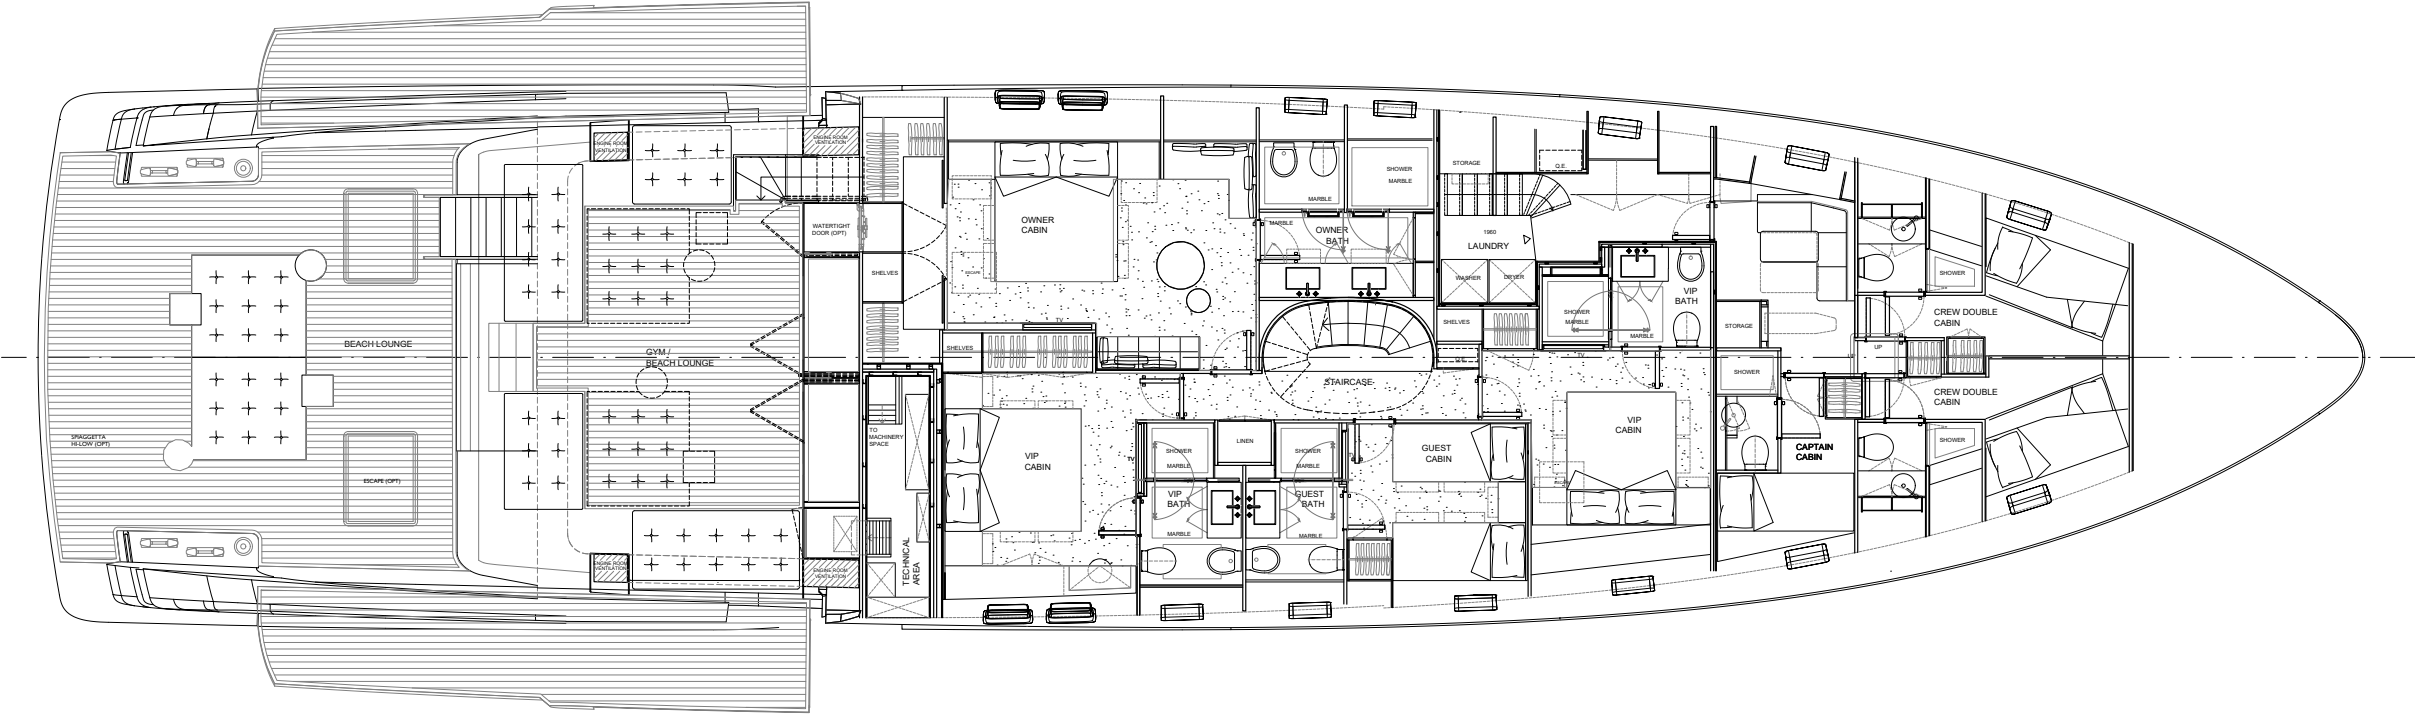

Main deck

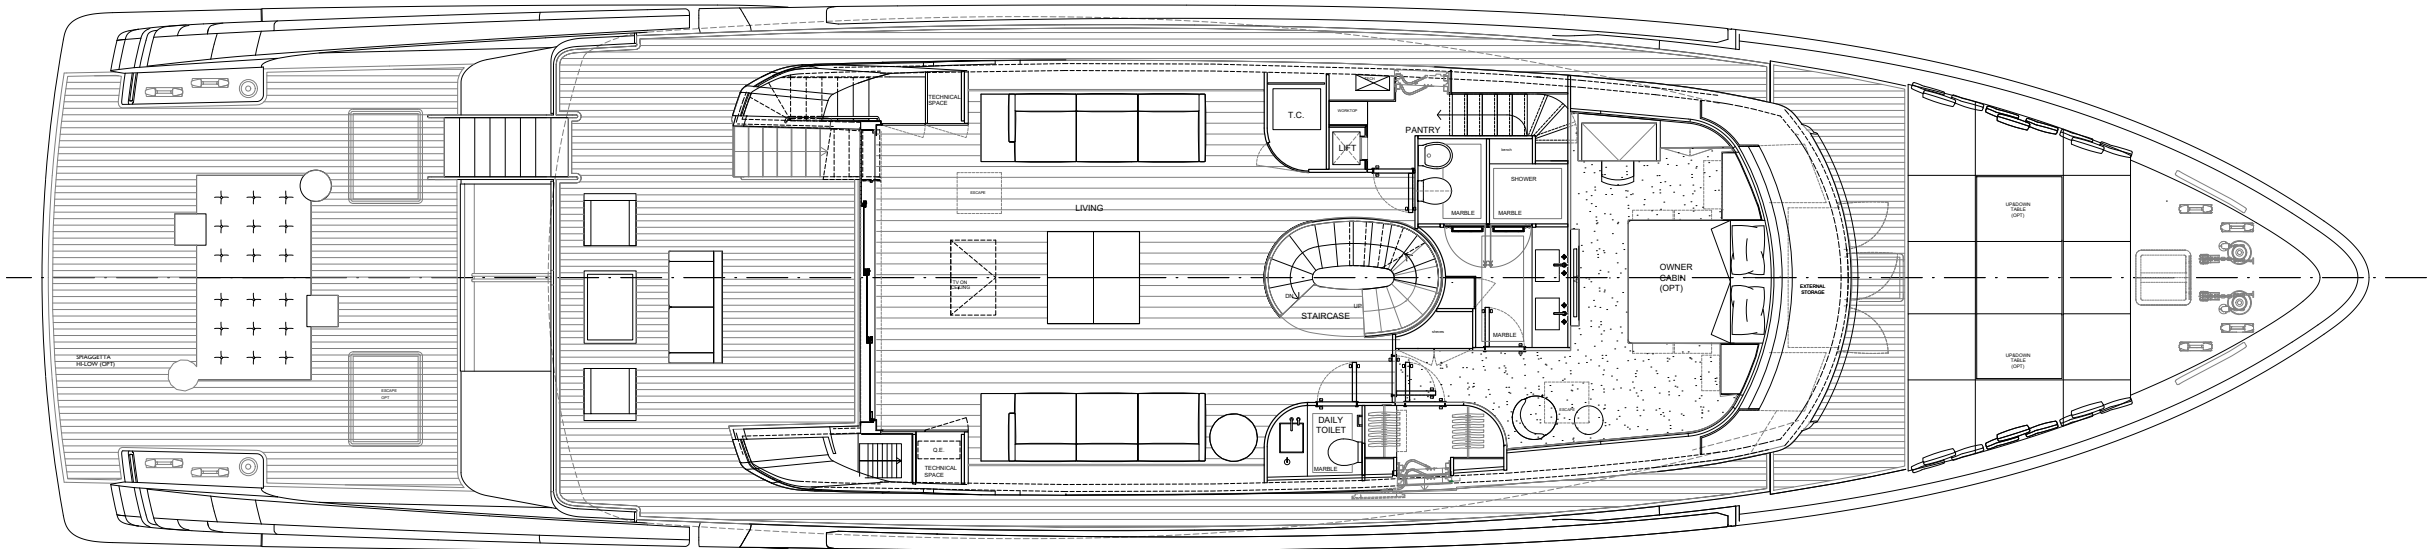

Lower deck

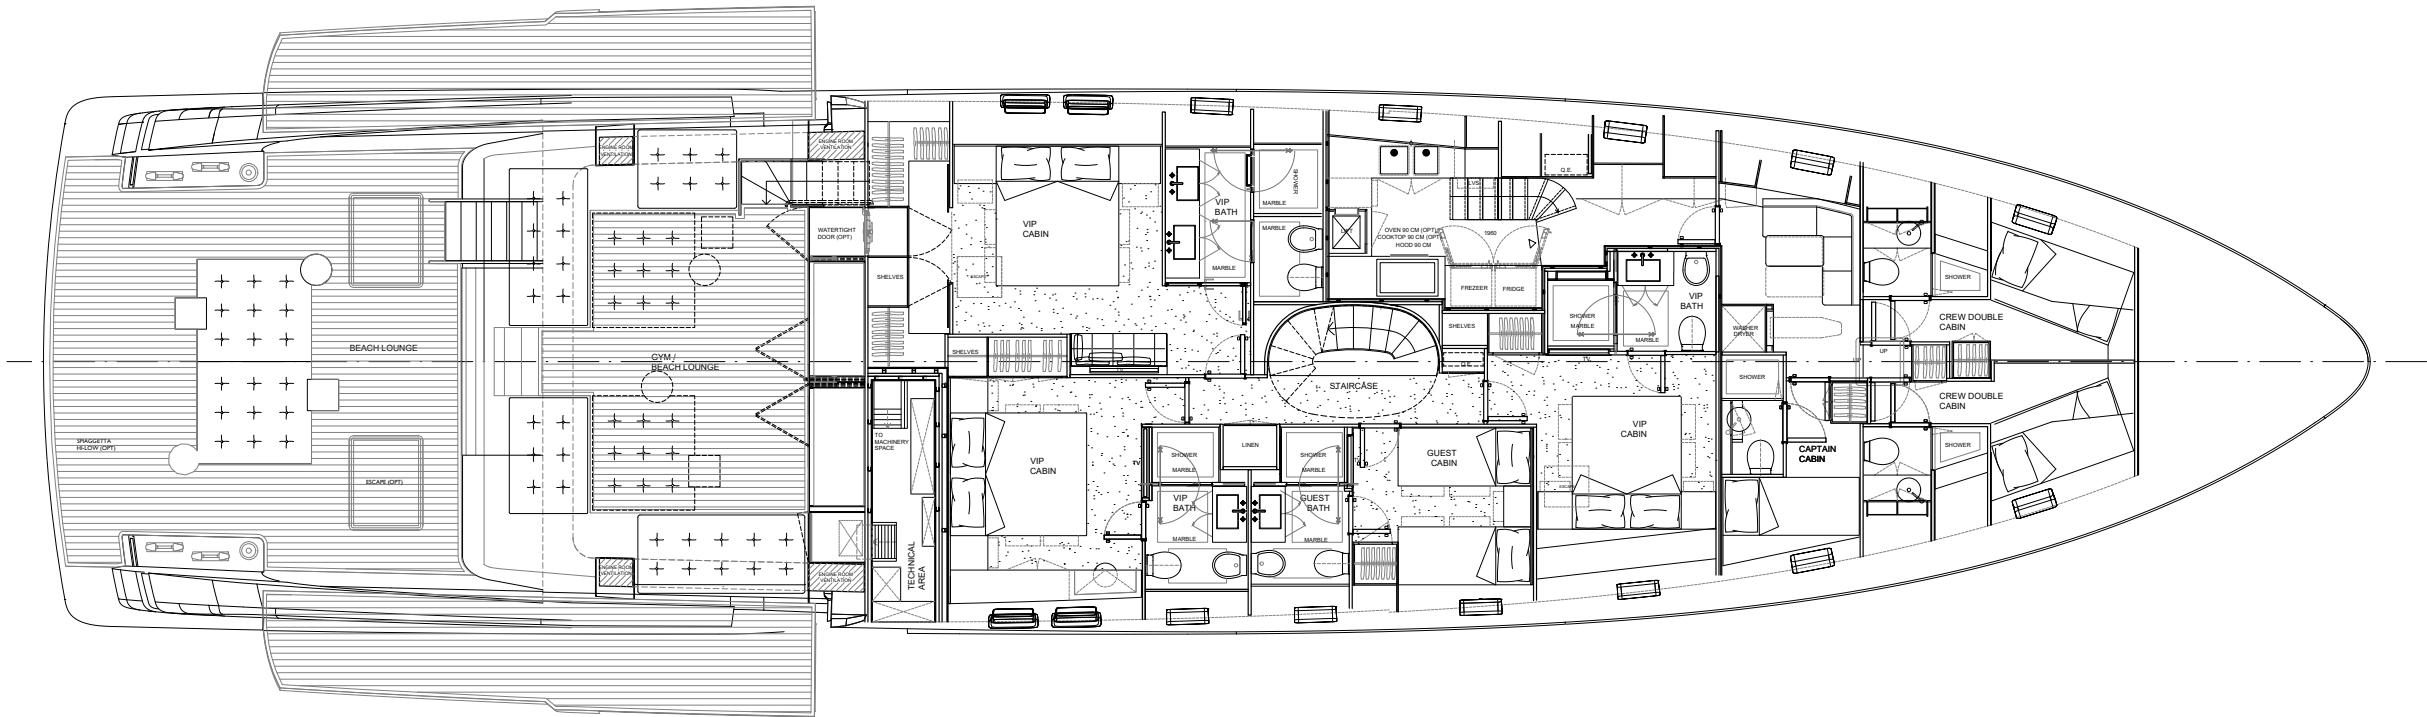

SX
112/



Length overall	34,16 m
Maximum beam	8,00 m
Construction height	4,30 m
Displacement @ half load (*)	138 t
Displacement @ full load (*)	149 t
Waterline length @ half load	31,06 m
Waterline length @ full load	31,14m
Draught @ half load	1,88 m
Draught @ full load	1,94 m
Guest accommodation	10 people
Crew accommodation	5 people
Engine	4 x IPS3 1350S Volvo D13B – 1000 Hp
Consumption (approx) (**)	550 l/h 2200 rpm
Power output @ 100% MCR (**)	1940 kW @ 2400 rpm
Gearbox	-
Transmission	4 x IPS
Propeller	Volvo IPS propellers
Shafts	-
Gensets	1 x 55 kW + 1 x 70 kW
Rudders	-
Maximum speed (approx) (***)	23 kn
Cruising speed (approx) (***)	20 kn
Economical speed (approx) (***)	10 kn
Max range @ economical speed (approx.)	1600 nm
Deadrise	15°
A/C power	240000 btu/h
Fuel capacity	18800 l
Fresh water capacity	2200 l
Black water capacity	850 l
Grey water capacity	950 l
Tender length	Max 6,25 m
Tender weight	Max 1600 kg

* Displacement data refers to a yacht with standard layout as described in the sales specification

** Speed data refer to a yacht with standard layout as described in the sales specification, considering a third of liquid weight, a third of luggage weight (25kg per bed) and 5 crew members (80kg each), and without stabilization system and hard-top

It's not an investment if it's destroying the planet



INFUSION
LAYUP SYSTEM



FSC CERTIFIED
WOOD SUPPLY



FORMALDEHYDE
FREE FURNITURE



LED
LIGHTING



BIOCHROME®



SUSTAINABLE
LEATHER



CLASS
A++



HULL
EFFICIENCY



THERMAL
INSULATION